



(11) Publication number : **0 600 713 A2**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number : **93309556.4**

(51) Int. Cl.⁵ : **H04Q 7/00**

(22) Date of filing : **30.11.93**

(30) Priority : **01.12.92 FI 925472**

(43) Date of publication of application :
08.06.94 Bulletin 94/23

(84) Designated Contracting States :
AT CH DE ES FR GB IT LI NL SE

(71) Applicant : **NOKIA MOBILE PHONES LTD.**
P.O. Box 86
SF-24101 Salo (FI)


(71) Applicant : **NOKIA TELECOMMUNICATIONS OY**
P.O. Box 33
SF-02601 Espoo (FI)

(72) Inventor : **Leppanen, Pentti**
Haapakuja 11 B 10
FI-90650 Oulu (FI)

(74) Representative : **Frain, Timothy John**
Patent Department
Nokia Mobile Phones
Ashwood House
Pembroke Broadway
Camberley, Surrey GU15 3SP (GB)

(54) **Communication method and system.**

(57) The invention is a communication method with the equipment belonging to it and its aim is to increase the number of users in a network or cell. Data is transmitted by the method by using a combined CDMA/TDMA or TDMA/CDMA multiple use whereby complementary code sets (complete orthogonal codes or non-interacting codes) are used as spreading codes. In the applications of the method to existing or planned TDMA systems, a CDMA part is added to them, by which a spreading coded CDMA multiple access is used in every time slot of the TDMA frame, in said way, to increase the number of users. The described method does not require any power control methods, nor any multiple access interference cancelling methods to increase network or cell capacity.

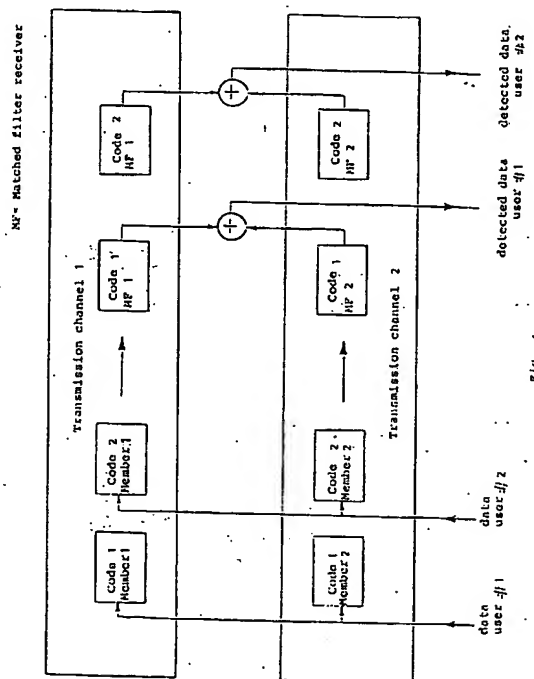

EP 0 600 713 A2

The invention relates to a method for radio telephone communication. The invention also relates to corresponding communication equipment or system for implementing the method.

In principle, for a multiple access communication in a radio channel there are three kinds of methods: the FDMA, the TDMA and the CDMA multiple access. The CDMA method has been made possible by the development of the spread spectrum technique. The spread spectrum technique has many known advantages as compared with the traditional communication methods. One of the fundamental reasons for using CDMA in civil communication (e.g. in mobile cellular network) is the frequency efficiency.

As communication needs have increased there has been a corresponding increase in the number of users which is a problem in mobile systems. The construction of totally new systems and the infrastructures required by them (base stations, exchanges, etc) to overcome these problems is expensive, thus one alternative has been proposed which is to widen the capacities of the existing systems by some additional characteristics. It is, for instance, possible to design "on" - or "in" - the digital TDMA systems (as GSM and DECT) to introduce some CDMA characteristics, whereby the number of the users of the TDMA system can be increased to a total capacity that is possible to reach by the CDMA systems. Thus the system would be a combination of all the multiple access methods, its implementation would be carried out through evolution and its infrastructure would be less expensive.

In the following, the basic factors connected with the CDMA are discussed. In the CDMA system, every user has a specific spreading code by which the users are separated from each other. In an ideal case, the spreading codes are orthogonal in relation to each other. It is thus possible to demodulate from the received signal the symbols transmitted by every user by matched filters according to the spreading codes. In the ideal case when the codes are completely orthogonal, samples taken from the output of the filters include only data from the signal which is to be detected, and is owned by the desired user. In an ideal system it is completely linear and synchronous and where the spreading codes are orthogonal, between the different multiple access methods (FDMA, TDMA, CDMA) there are no differences, as far as the spectrum efficiency is concerned. In practice, however, no system is completely ideal in all conditions. This is why the choice of the multiple access method is significant. For instance, in the mobile radio channel the CDMA system has many advantages: there is less intersymbol interference (ISI) between the symbols than in the narrow band systems, fading will decrease and a narrow band system can operate within the same frequency range as an overlay system with a CDMA system. Also the above mentioned

spectrum efficiency - or, using another interpretation, the channel capacity - will be enhanced.

In practice, in the CDMA system the signals from different users propagate from the transmitter to the receiver along a distance that is different for every signal. Thereby the signals will be delayed in the channel by delays of different length and reach the receiver during different code phases. Furthermore, different users transmit independently from each other which, in addition to the channel influence, causes phase randomness in the received signal. Due to the fact that the orthogonality of the spreading codes is (in general) not possible for all the values of the delays, some influence of the cross-correlations between the signals of other users is seen, in addition to the autocorrelation function of the desired signal, in the outputs of the matched filters to the spreading codes. Thus different users interfere with each other. The created interferences are called multiple access interferences.

In cellular mobile communication, different mobile phones transmit their signals independently from each other, and the signals propagate via different paths to the base station. From the base station the signals to be transmitted to different mobile phones can, however, be transmitted simultaneously. The interfering signals, transmitted by the base station and received by each mobile phone, also propagate via the same path as the desired signal. Therefore, the multiple access interferences are only particularly significant when detecting signals transmitted by different mobile phones at the base station.

The non-orthogonality of the spreading codes is a basic problem that weakens the performance of a practical CDMA system. The different propagation path lengths of the signals also cause differences in the received power levels. This situation arises e.g. when several mobile phones transmit their signals to one and the same base station: the signal, from the mobile phone which is nearest to the base station is stronger than signals from more distant locations when received at the base station. A strong signal disturbs detection of weaker signals. The problem is known as the near-far-problem. In mobile phone telecommunication the near-far-problem is significant particularly when detecting signals from different mobile phones at a base station.

In the CDMA system there would be no near-far-problem, or multiple access disturbances generally, if the spreading codes were accurately orthogonal. Therefore, attempts have been made to solve the problem by generating code families with as little cross-correlation as possible between code members. The multiple access disturbances in the CDMA system cannot in all situations be eliminated through code design, they can only be reduced; the exception being a system with known delays.

When the difference between the power levels of

two signals is large, even a minor cross-correlation between the desired and the interfering signal causes a major interference in the detection of a weak signal. This problem can be alleviated by lowering the transmission level of the strong interfering signal so that the received power levels of the desired and the interfering signals are of the same order. This method is called power control. Power control is a straight forward, conventional way to decrease multiple access interferences. The problem in such power control techniques is that the method measures average transmission powers, leading to a worse signal-to-noise ratio and to an increase in the bit error rate. Thus, power control may result in sufficient degradation of a signal so as to annul its beneficial influence.

The interferences created by users between each other can also be decreased by signal detection methods. These methods are called multiple access interference cancelling methods. When there is only one user in the spread spectrum system, or when the spreading codes in a CDMA system are orthogonal, the received signals in a noisy channel can be detected in relation to the bit error probability in an optimal way, using matched filters to the spreading codes. When the spreading codes are non-orthogonal there are better detection methods than the one mentioned above. In CDMA system signal detection studies it has long been assumed that multiple access interferences could be accurately approximated as Gaussian random processes, and that therefore the matched filter and the memoryless detector of the spreading codes could form an optimal receiver in an ideal channel. However, this assumption is not valid in a practical situation.

In practice, a non-ideal cross-correlation function between the codes of different users is detrimental to the operation of the individual receivers as well. It makes both acquisition and tracking of the code synchronisation of the receiver difficult. Respectively, the deviation of the code autocorrelation function from the ideal impulse-like autocorrelation causes problems in code acquisition and tracking, and in a fading multipath channel, in particular.

Therefore there are no spreading codes to create ideal characteristics in all practical situations. By an ideal characteristic is meant the impulse-like characteristic of the code autocorrelation function, whereby it has the top level in relation to length at zero delay value and its sidelobes are zero at all other delay values. Regarding the CDMA multiple use, it is required that the cross-correlation function between the codes in a code set is zero at all possible delay values (completely orthogonal codes) and not only at zero delay.

There is a set of spreading codes with which desired ideal features can be obtained by certain conditions. This kind of a code set comprises complementary codes or sequences. These are characterized by

the fact that one single code in the code set is formed by several (equally long) members, the sum of the autocorrelation functions of which is ideally impulse-like. Each CDMA user code is built by the members of the code set so that the sum of the mutual cross-correlation functions is zero at all delay values (non-interacting or completely orthogonal codes or code sets). The formation of spreading codes has been described, e.g., in B.P. Schweitzer, Generalized Complementary Code Sets, 1971, doctor's dissertation, University of California, Los Angeles, USA, 87 pages.

When putting into practice a communication system where the number of users is K , K complete orthogonal codes are required. They are formed by K members of a code set, e.g. in the way presented in Schweitzer's study. The transmission of the members of the codes of each user requires K orthogonal channels where, by combining (summing) the output signals of the matched filters a situation in a multiple access case is reached where the users do not interfere with each other. For instance in Fig 1 there is a case of two users ($K=2$).

Depending on the transmission channel, the orthogonal channels are created in many ways. If the coherence time of the channel is long enough, one transmission channel can be split into K different time slots and thus create K orthogonal channels. Respectively, if the width of the coherence band of the transmission channel is wide enough, the channel can be split into K non-overlapping frequency intervals whereby the orthogonal channels are created. Other orthogonalization possibilities with one channel transmission comprise, e.g., the use of the quadrature components of the carrier wave ($K=2$) and the use of different polarisation levels or rotation directions.

Fig. 2 shows a two user CDMA system illustrating the principles of the application of a complementary code set e.g. in a cellular network. A cell includes two mobiles MS#1 and MS#2 and a base station BS, comprising the receivers for both of the users #1 and #2. Ideal characteristics of the complementary code set are brought in to use when the radio channel is time-multiplexed into two orthogonal channels 1 and 2, completely independent from each other. The assumption thereby is that the coherence time T_D is long enough, regarding the orthogonal signal processing required. In a two user system two codes (a code pair) for each user are required. Interferences and noise will be summed into the signals in the radio channels. In this example, it is assumed that the radio channels are ideal. The spreading codes of the users #1 and #2 are e.g. selected according to the principles presented in the Schweitzer study, so that they will, at all delay values, form a complete orthogonal code pair. The spreading code waveforms of the data signal d_1 of mobile MS#1 are s_{11} for channel 1 and s_{12} for the orthogonal channel 2. In the base station receiver

#1 there is a filter h_{11} matched for the code of channel 1, and h_{12} for channel 2. As a principle, by summing the output signals R_{11} and R_{12} of the filters an ideal detection result d_1 for the user #1 is derived from the summed signal R_1 . Respectively, the spreading codes of the mobile MS#2 are s_{21} and s_{22} and the matched filters h_{21} and h_{22} , the summed signal $R_2 = R_{21} + R_{22}$ of which gives an ideal detection result for the user #2 (d_2).

The signals of the base station receivers are discussed at a principle level. It is assumed that the data signals have been BPSK spreading modulated to the carrier wave and the bits are presented as follows: bit "1" \rightarrow waveform "+" and bit "0" \rightarrow waveform "-". As an example, let us assume that the system ($K=2$) uses the following signals (a complementary code pair and to it a complete orthogonal pair): the spreading codes $s_{11}=+++-$, $s_{12}=+++-$ of MS#1, the waveforms $S_{21}=+++-$, $S_{22}=+++-$ of MS#2. Thus, the impulse responses of the matched filters of the base station BS are: receiver #1 $h_{11}=+++-$ and $h_{12}=+++-$ and receiver #2 $h_{21}=+++-$ and $h_{22}=+++-$. It is assumed in this example that the data signals of the users are binary ($d_1="1"$, $d_2="0"$) and that all gains are normalized as ones. Then MS#1 transmits the waveform $s_{11}=+++-$ to channel 1 and the waveform $s_{12}=+++-$ to channel 2. Respectively, MS#2 transmits the waveforms $-s_{21}=--+-$ and $-s_{22}=--+-$, when the influence of the data bit d_2 on the BPSK signal is taken into consideration.

Fig. 3a shows signals of the base station receivers when no interferences nor any noise is summed to the transmission signals in the channels, and when all the gains are assumed to be ones. The receiver gives to both of the users #1 and #2 a waveform that resembles an ideal impulse function and from which the required data symbol detection can be made. Fig. 3b illustrates a multiple access situation when the spreading signals of user #1 (MS#1) are also arriving at the receiver of user #2 (MS#2) and vice versa. The aim of this figure is to show that no multiple access interferences or non-interacting arise and no power control are needed.

In a first aspect of the invention there is provided a method for radio telephone communication comprising, assigning respective groups of radio telephone users to respective ones of a plurality of orthogonal radio telephone communication channels, and assigning to each user of said groups mutually orthogonal spreading codes.

In a second aspect of the invention there is provided a system for radio telephone communication, comprising means for assigning respective groups of radio telephone users to respective ones of a plurality of orthogonal radio telephone communication channels, and means for assigning to each user of said groups mutually orthogonal spreading codes.

These have the advantages that the number of users in a communication network or cell can be es-

entially increased, without any power control methods or any cancelling methods to be applied to the multiple access interferences.

A specific embodiment of the invention will now be described, by way of example only, with reference to the drawings in which:

Fig. 1 shows the case already described where the number of users is K ;

Figs. 2 and 3a, 3b also show the described case where there are two users;

Fig. 4a illustrates the principle of the method according to the invention;

Fig. 4b shows the principle block diagram of the system according to the invention;

Fig. 5 shows the signal structure connected with the description of the method;

Fig. 6 shows several signals, respectively, within one time slot; and

Fig. 7 shows an example of the way to use the invention in the GSM system.

Accordingly, this invention relates to a communication method in which data is transmitted in a combination with both the CDMA and the TDMA methods, using the generally known modulation methods (either coherently, noncoherently, differentially coherently or generally as M-ary symbols), from the base station to the user or vice versa. Both the base station and the users can be fixed and/or mobile. Known duplexing methods can be used in the bidirectional communication.

Fig. 4a shows the principle of the method. The users of the communication system ($L \cdot K$) are multiplexed to L TDMA users and K CDMA users so that, during the time frame T_k to be formed from the information of L users, n data bits or data symbols of each user are transmitted in their time slots T_{TDM} . During each time slot T_{TDM} data (n data bits or data symbols) from K other users are transmitted by the CDMA method, using the complete orthogonal code sets (complementary code sets) for spreading the spectrum

In accordance with the invention there is provided equipment for the communication system (Fig. 4b) or, in case the method is combined with existing TDMA systems (such as GSM or DECT), it also comprises a CDMA part providing the orthogonal increase of the number of users.

The communication system increases the number of users in a cell (network) so that the signals of the users are (as far as possible) orthogonal in relation to each other, so that the users will not interfere (or are non-interacting) with each other. Users that do not interfere with each other are obtained by a TDMA multiple access, whereto more users are connected by complete orthogonal code sets (such as complementary code sets), using the CDMA multiple access.

The users are broken down into groups that do

not interfere with each other, first, by time multiplexing, and then mutually orthogonal users are added to each time slot as a CDMA. Breaking the users down to groups that do not interfere with each other can also be carried out in reverse order. Then the time slot comprising CDMA users does not require any network power control methods to solve the near/far problem, nor any multiple access interference cancellation methods, to increase the number of users. If the CDMA part would be carried out in a well known way it would require at least power control in order to avoid the near/far problem.

The total number of users that do not interfere with each other is the number of time slots (L) times the number of the CDMA users (K) in a TDMA time slot.

The communication link is time synchronized, i.e. all users shall know the real time, with a certain uncertainty, as presupposed by the TDMA method. The time synchronization of the users of the network and of the base station can be obtained in well-known methods. The accuracy requirement of the time synchronization is influenced by the maximum value of the multipath delay spread (T_M), the propagation delay difference (T_R) of the internal signals of the network (depends on the locations and the relocating of the users) and other inaccuracies of timing (T_A).

Within each TDMA time slot, several other simultaneous additional users transmit data using the CDMA method, each using a code set of his own. The spreading code sets have been selected so that they are complete orthogonal in relation to each other, i.e. the cross-correlation between the code sets of the users is zero at all delay values, not only at zero delay value. This kind of code sets can be formed from the known complementary code sets. Then, within a time frame, there is no need to have any exact time synchronization. The duration of the time slot must be equal to or shorter than said coherence time (T_D) of the transmission channel, in order to enable the formation the desired combinations of the output signals of the matched filters of the members in the code sets.

Fig. 5 shows, as an example, a signal structure in one time slot. It is assumed that the availability concerns a complementary code set comprising K member codes S_1, S_2, \dots, S_K and that the length of each of them is N bits. From these member codes a complete orthogonal spreading code is formed for K users, according to known principles. For instance, the

spreading code of a CDMA user #1 comprises the members $S_{11}, S_{12}, S_{13}, \dots, S_{1K}$, where S_{1K} ($k=1, 2, \dots, K$) is one of the members S_1, S_2, \dots, S_K , determined by the complementary characteristics. In the figure, the signal structure indicates one transmission burst, whereby n data bits or data symbols are transmitted. In the beginning of the burst, the

data symbols (0, 1, ..., n) following each other are spreading modulated in well-known ways by the code member S_1 . The length of this transmission is nNT_c seconds. Then follows a transmission pause the length of which is $T_M + T_R + T_A$ seconds. This transmission pause is used to prevent the signal of the previous code member to reach the receiver during the following code member, due to the multipath propagation or timing inaccuracies, because then the influences of the cross-correlation between the code members would be perceptible in the receiver (it is true that the code members are orthogonal between themselves but not completely orthogonal at all delay values). After the transmission pause the data symbols are retransmitted but now they are spreading modulated by the code member S_{12} and the transmission is followed by a pause. This is repeated until the data symbols have all been spreading modulated by all of the code members of the user. The sum of the times nNT_c and $T_M + T_R + T_A$ is indicated by time T_{MUX} and it can be utilised in the receiver to change the matched filter when the spreading code member is changed in the transmission, but its use is not necessary.

Fig. 6 shows how the method is applied in the case where the users MS#1, MS#2, MS#3, and MS#4 are transmitting by the CDMA multiple use in the same TDMA time slot I to the base station BS. The users can be described with the common way of indication in figure 4a: #1,1 #1,2 #1,3 and #1,4. In this example case comprising four CDMA users, it is possible to use the complementary code set $S_1=++++$, $S_2=-+-$, $S_3=++--$, and $S_4=-++$. From this the complete orthogonal spreading codes for the users can be derived as follows:

#1,1	$S_{11}=++++$,	$S_{12}=-+-$,	$S_{13}=$
$++-$,	$S_{14}=+--$,		
#1,2	$S_{21}=+-$,	$S_{22}=++++$,	$S_{23}=+-$
$+$,	$S_{24}=++--$,		
#1,3	$S_{31}=++-$,	$S_{32}=+-$,	$S_{33}=+$
$+++$,	$S_{34}=+-$,		
#1,4	$S_{41}=+-$,	$S_{42}=++-$,	$S_{43}=+-$
$-$,	$S_{44}=++++$.		

It is assumed that in this example $n=116$ bits are transmitted during the time period T_{TDM} . The time reference used by the base station is also indicated in the figure. The time period T_{MUX} can, if desired, be also used in the base station receiver for the change of the spreading code members in matched filtering.

The spreading codes in the time slot shown in Fig. 5 can also be considered, in addition to the use of the complementary code sets, as an innovating way to design the spreading coding entity with transmission pauses (ternary spreading coding).

The processing gain created in the receiver when K matched filtering results are combined, is not needed to eliminate the interferences caused by the other users of the same time slot but only to decrease in-

interference from other sources, for instance, to attenuate transmissions coming e.g. from a neighbouring cell where the same code sets are used (there is no presupposed synchronization between base stations), to eliminate interferences leaking from other carrier wave channels and other, especially narrow band interferences or jamming.

The advantage of the communication method described in the invention is the possibility of increasing the number of users on the same carrier wave or frequency channel so that the users do not interfere or interact with each other (increasing the network capacity). The method can also be applied to existing or planned TDMA communication systems, such as GSM, DECT and the corresponding North American IS-54 or the TDMA system according to the Japanese standard RCR-27. With this method, the network capacity might be increased several times and then its capacity would match a pure CDMA network. Then the method is applicable with the construction of a CDMA accessory.

Fig. 7 shows the GSM system principle as an operational example of the invention. When about 16.5 Mbits/s is selected as the bit rate of the code, eight other, complete orthogonal users can operate within one GSM time slot in a propagation environment where the multipath delay spread, the differences in propagation delays and in timing accuracy will altogether be 16 μ s. Then 64 users in all can be taken to one single carrier wave, or frequency channel.

Fig. 6 can be used as another application example of another GSM type system. When 3.62 Mbits/s is selected as the bit rate in the Fig. 7 propagation environment, and with the conditions $K=N=4$, altogether 32 users could be taken on one carrier wave, or frequency channel.

Using complementary code sets will mean further advantages connected with single radio links (BS \rightarrow MS#n, MS#n \rightarrow BS). From the point-of-view of a one user receiver, the ideal characteristics of the spreading code autocorrelation function will facilitate the acquisition and tracking operations of code synchronization, as well as RAKE reception.

In a network or cell, no power control methods nor any multiple access interference cancelling methods are required to increase their capacities. It is possible to use a rough power control, as in the TDMA systems, to compensate the propagation attenuations, due to the mobile stations locating at different distances from the base station.

In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

The scope of the present disclosure includes any novel feature or combination of features disclosed therein either explicitly or implicitly or any generalisation thereof irrespective of whether or not it relates to

the claimed invention or mitigates any or all of the problems addressed by the present invention. The applicant hereby gives notice that new claims may be formulated to such features during prosecution of this application or of any such further application derived therefrom.

Claims

1. A communication method especially for cellular mobile communication, **characterized** in that a combined CDMA/TDMA or TDMA/CDMA multiple access is used and that in the CDMA part complementary code sets or complete orthogonal codes between the users are used as spreading codes.
2. A method according to claim 1, **characterized** in that in each case a transmission burst is transmitted, comprising a certain number of data bits or data symbols, to be spreading modulated by one code member (S_n1), after which a transmission pause follows, next burst is transmitted, modulated by another spreading code (S_n2), orthogonal in relation to the preceding one, after which another transmission pause follows, a.s.o.
3. A method according to claim 2, **characterized** in the fact that the length of the transmission pause is $T_M + T_R + T_{\Delta}$, where T_M is the so-called multipath delay spread, T_R is the signal propagation delay difference within the network or cell, and T_{Δ} is the inaccuracy of the time synchronisation of the users.
4. A method according to the claim 3, **characterized** in that the total time (T_{MUX}) belonging to the spreading modulation of the transmission burst by all of the code set, including the transmission pauses, is used to change the spreading code members in the base station receiver and, respectively, to change the matched filter in the mobile station receiver.
5. A communication system, particularly for cellular mobile communications, **characterized** in that the transmission side comprises, connected to each other, the TDMA/CDMA or CDMA/TDMA blocks, and the receiving side, respectively, the CDMA/TDMA or TDMA/CDMA blocks.
6. A communication system, **characterized** in the fact that it has been carried out by constructing an additional CDMA accessory to the existing TDMA communication system.

7. A method for radio telephone communication comprising,
 assigning respective groups of radio telephone users to respective ones of a plurality of orthogonal radio telephone communication channels, and
 assigning to each user of said groups mutually orthogonal spreading codes.
8. A method for radio telephone communication according to claim 7, wherein the orthogonal spreading codes comprise complementary code sets.
9. A method for radio telephone communication according to claim 7 or 8 wherein the orthogonal communication channels comprise time division multiplexed channels.
10. A method for radio telephone communication according to claim 7 or 8, wherein the orthogonal communication channels comprise frequency division multiplexed channels.
11. A method for radio telephone communication according to claim 7 or 8, wherein the orthogonal communication channels comprise quadrature components of a carrier wave, different polarisation levels or rotation directions.
12. A system for radio telephone communication, comprising means for assigning respective groups of radio telephone users to respective ones of a plurality of orthogonal radio telephone communication channels, and means for assigning to each user of said groups mutually orthogonal spreading codes.

5

10

15

20

25

30

35

40

45

50

55

MF= Matched filter receiver

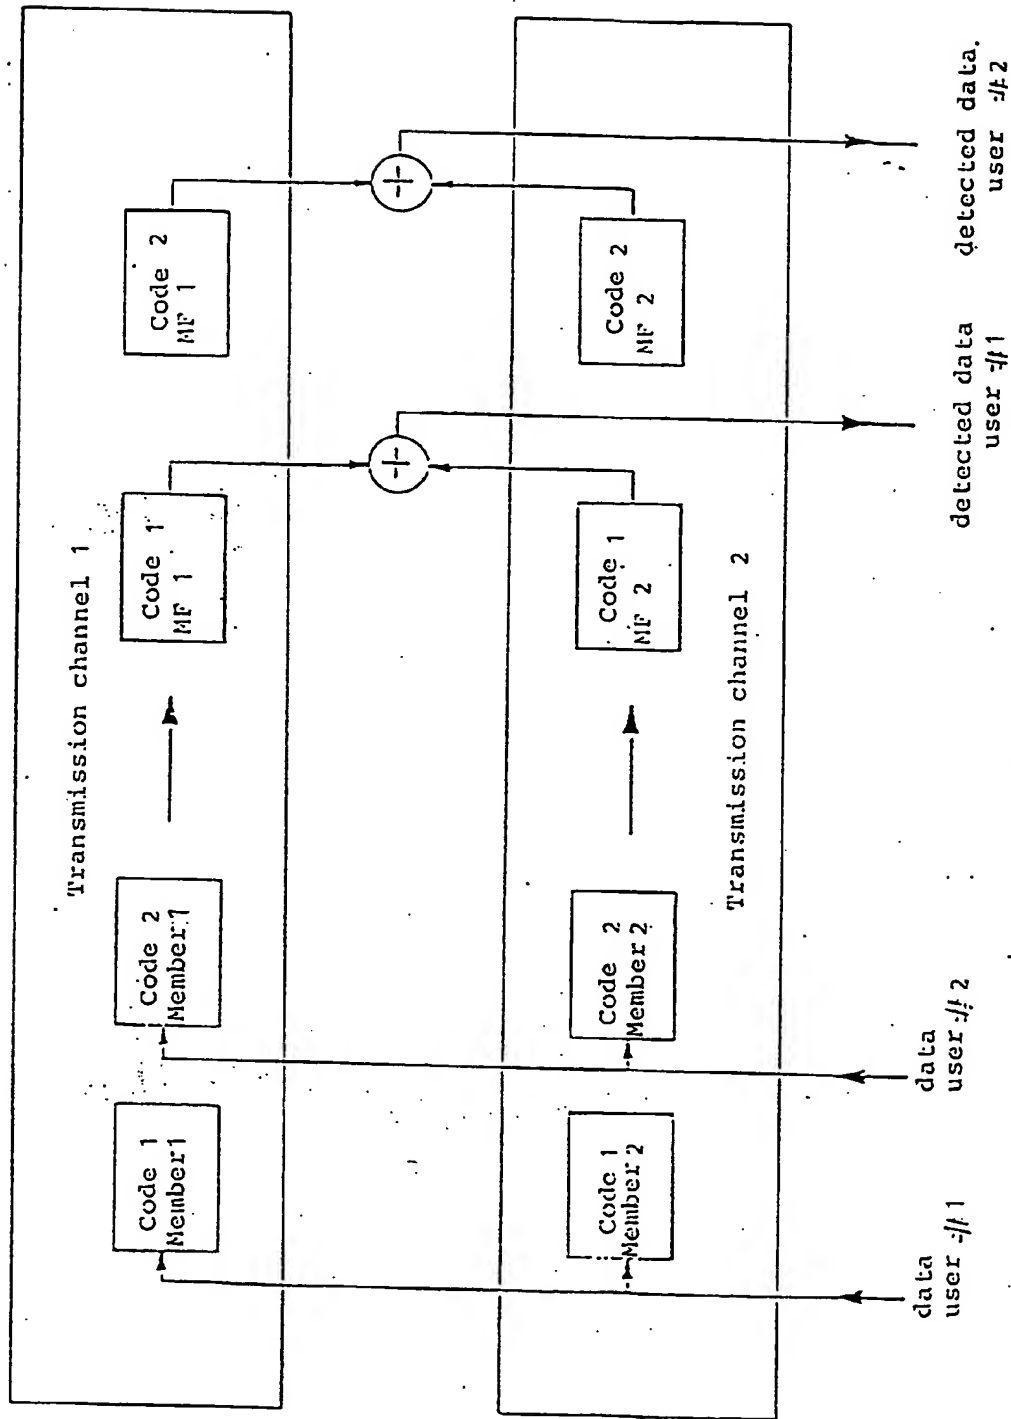


Fig. 1


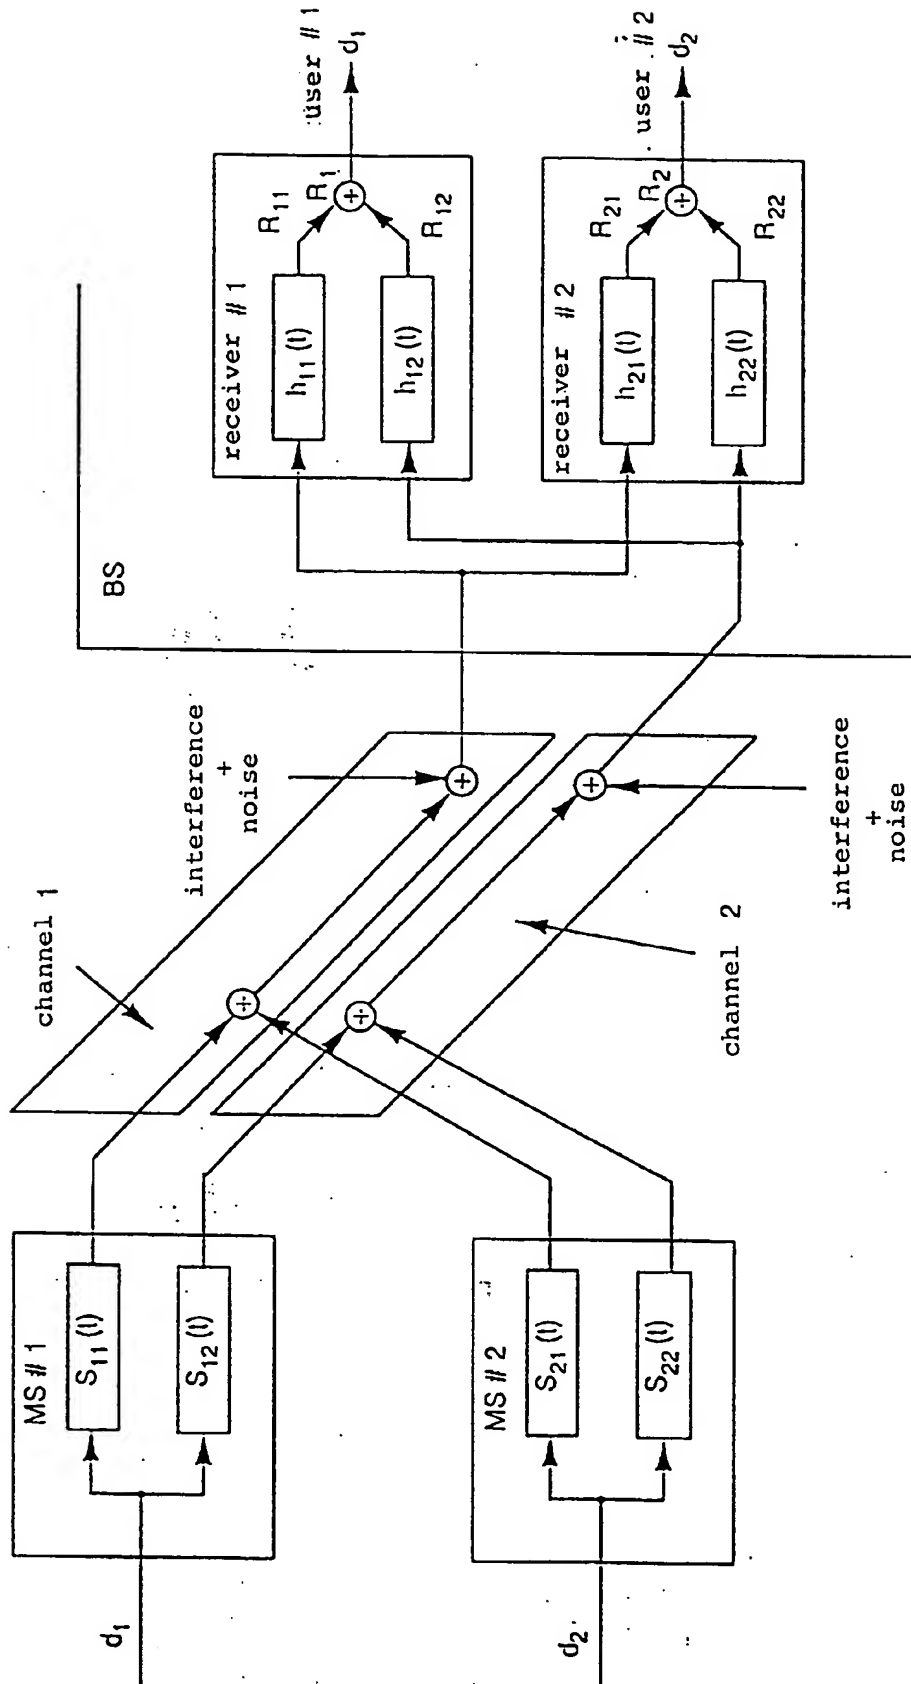


Fig. 2.

Normalized output signals of receiver #1, when MS #1 is transmitting

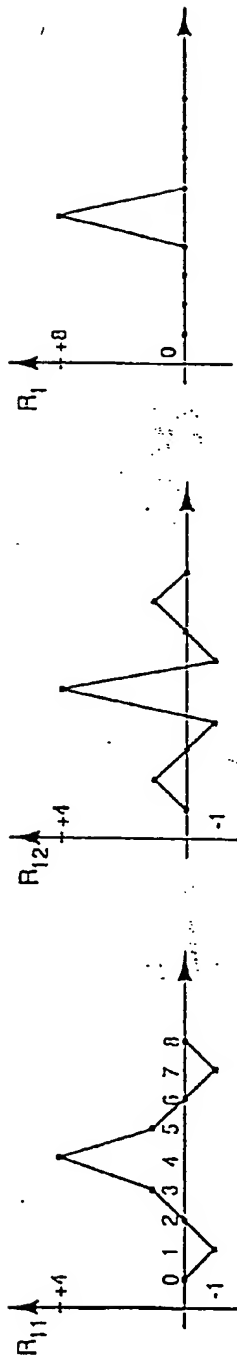

Normalized output signals of receiver #2, when MS #2 is transmitting


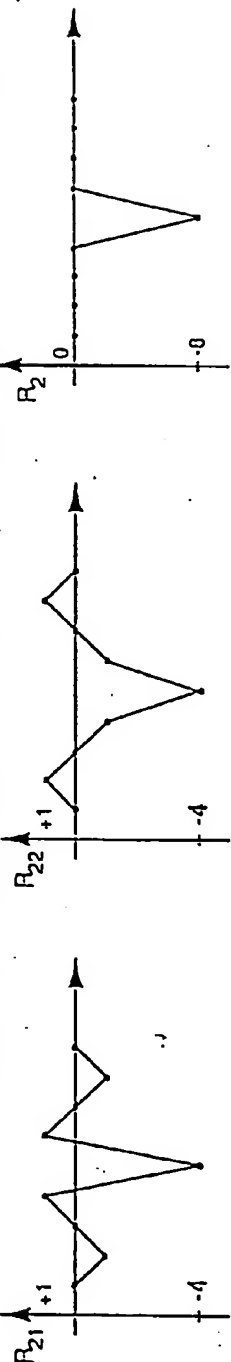


Fig. 3a

Normalized output signals of receiver #1, when MS #2 is transmitting

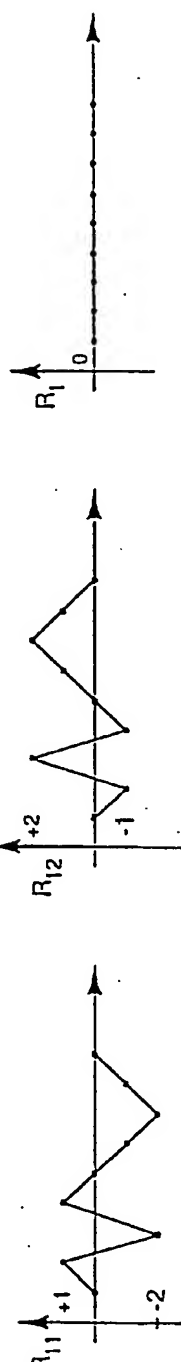

Normalized output signals of receiver #2, when MS #1 is transmitting

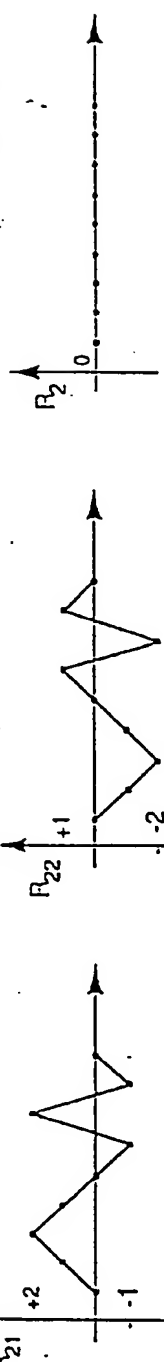


Fig. 3b

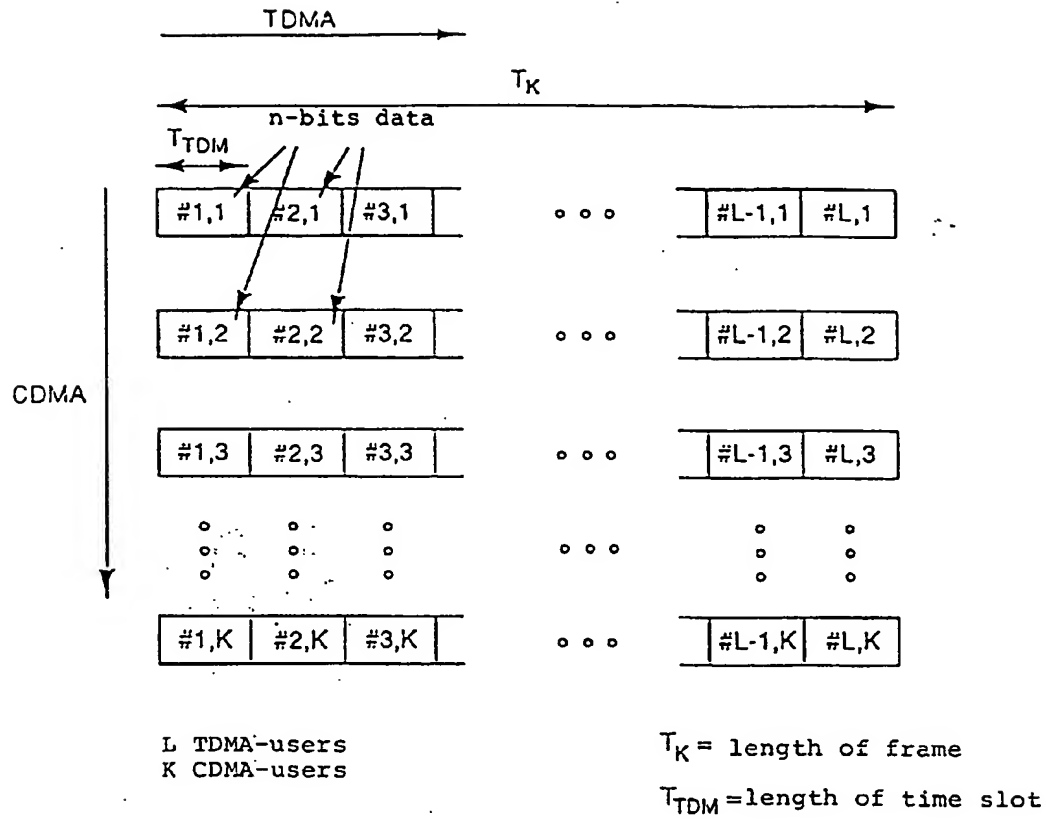


Fig 4a


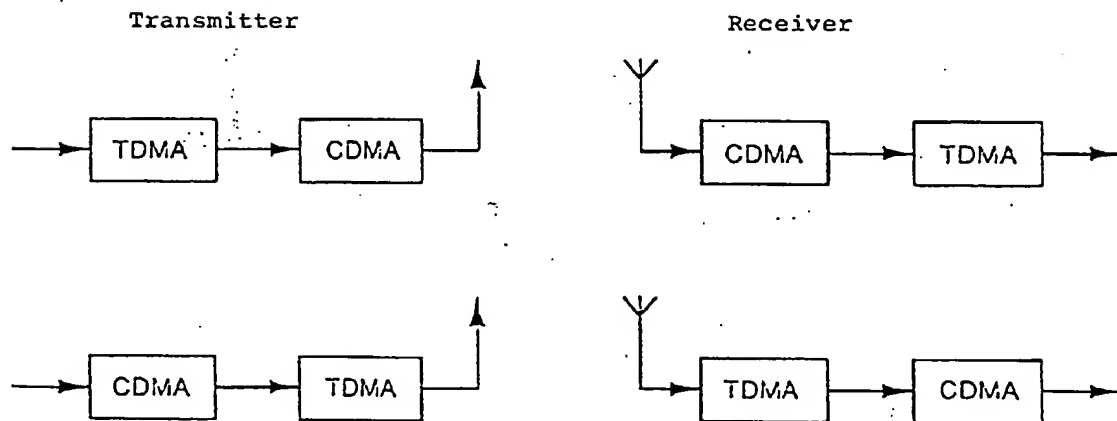


Fig 4b

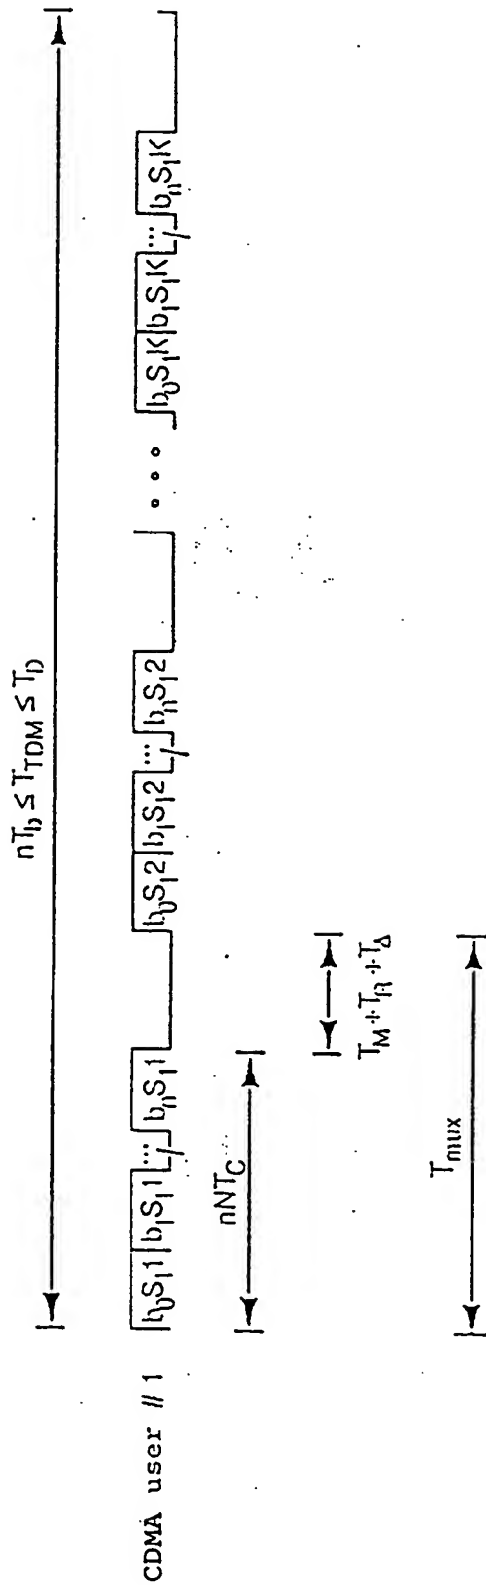

12

n = bits' or symbols per burst

 $N = \text{length of code set: member } S_k$
$$b_0, b_1 \dots b_n = \text{data bits or data symbols}$$

K = number of fully orthogonal users

 T_d = channel coherence time
$$T_{TDM} = \text{length of (possible) time slot}$$
$$T_C = \text{chip length}$$
 R_C = chip velocity T_b = length of bit or symbol

R_b = velocity of bit or symbol


$T_{\text{b}} = \text{multipath diffusion}$

T^R = propagation delay or differences of propagation delays

T'_A = inaccuracy of timing

$$T_{\text{mux}} = nNT_C + (T_N + T_R + T_\Delta)$$

Fig. 5

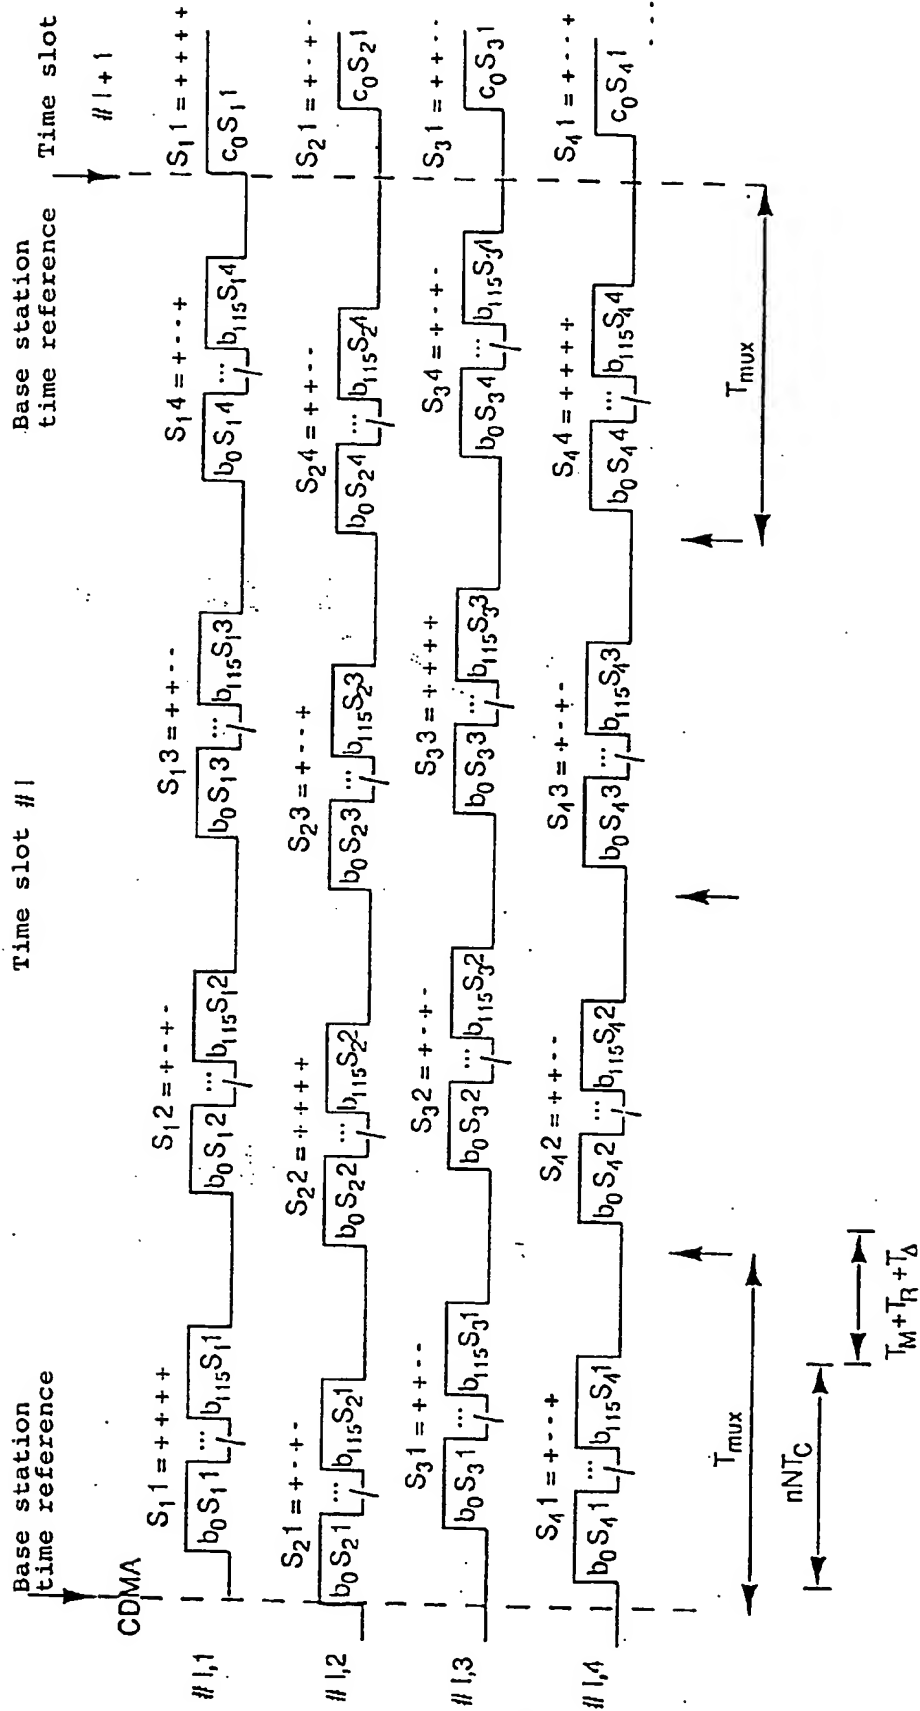

MS # 1, MS # 2, MS # 3, MS # 4 — BS

Fig. 6

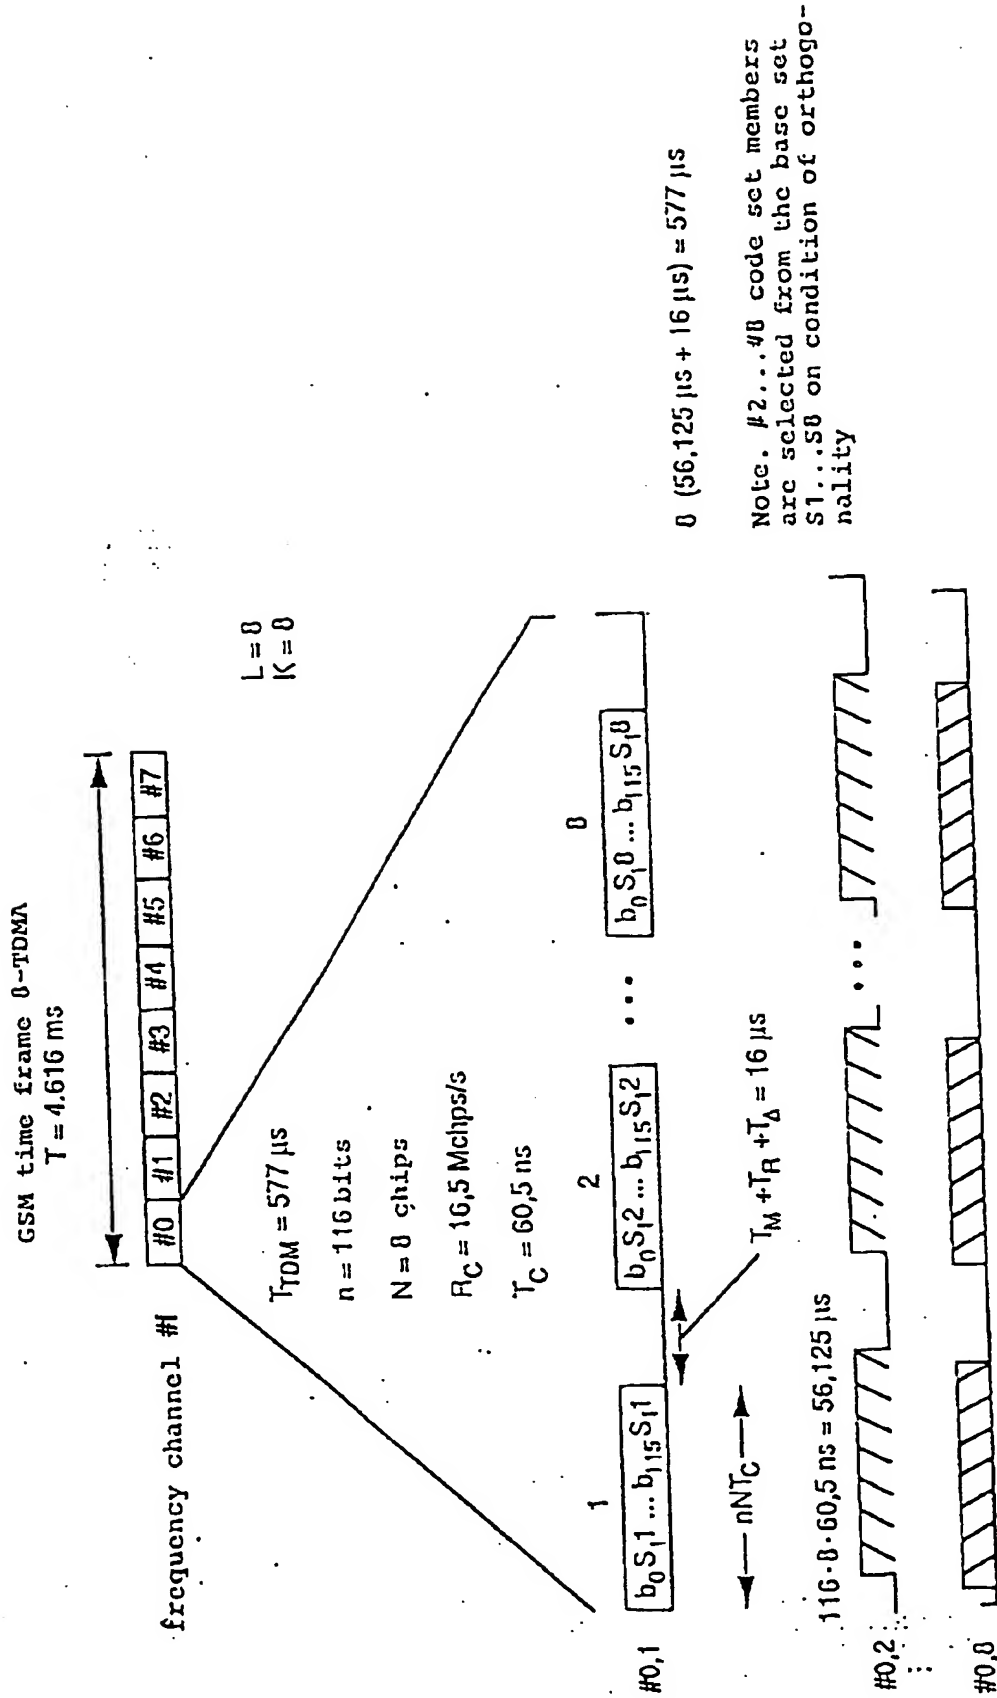


Fig. 7



Publication number : **0 600 713 A3**

12

EUROPEAN PATENT APPLICATION

Application number : **93309556.4**

Int. Cl.⁵ : **H04J 13/00, H04Q 7/00**

Date of filing : **30.11.93**

Priority : **01.12.92 FI 925472**

Date of publication of application :
08.06.94 Bulletin 94/23

Designated Contracting States :
AT CH DE ES FR GB IT LI NL SE

Date of deferred publication of search report :
28.12.94 Bulletin 94/52

Applicant : **NOKIA MOBILE PHONES LTD.**
P.O. Box 86
SF-24101 Salo (FI)


Applicant : **NOKIA TELECOMMUNICATIONS OY**
P.O. Box 33
SF-02601 Espoo (FI)

Inventor : **Leppanen, Pentti**
Haapakuja 11 B 10
FI-90650 Oulu (FI)

Representative : **Frain, Timothy John**
Patent Department
Nokia Mobile Phones
St Georges Court
St Georges Road
Camberley, Surrey GU15 3QZ (GB)

54 Communication method and system.

57 The invention is a communication method with the equipment belonging to it and its aim is to increase the number of users in a network or cell. Data is transmitted by the method by using a combined CDMA/TDMA or TDMA/CDMA multiple use whereby complementary code sets (complete orthogonal codes or non-interacting codes) are used as spreading codes. In the applications of the method to existing or planned TDMA systems, a CDMA part is added to them, by which a spreading coded CDMA multiple access is used in every time slot of the TDMA frame, in said way, to increase the number of users. The described method does not require any power control methods, nor any multiple access interference cancelling methods to increase network or cell capacity.

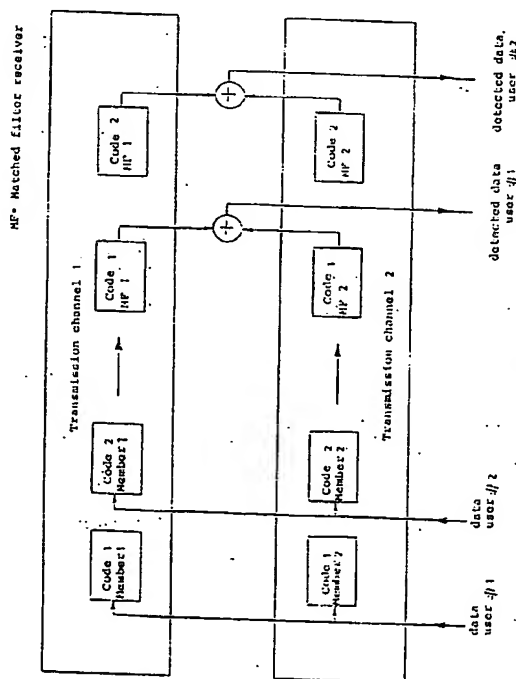

EP 0 600 713 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

DOCUMENTS CONSIDERED TO BE RELEVANT			EP 93309556.4
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X, P	WO - A - 93/15 573 (MILLICOM HOLDINGS) * Fig. 4a-5a; abstract; page 17, line 34 - page 18, line 6; page 18, lines 20-31 *	1, 6, 7, 9, 12	H 04 J 13/00 H 04 Q 7/00
X, P	WO - A - 93/07 693 (PHONEX) * Fig. 5; abstract *	5, 6	
A	--	1	
X	EP - A - 0 211 460 (PHILIPS PATENTVERWALTUNG) * Fig. 4; claim 1; column 6, line 1 - - column 7, line 5 *	1, 5, 6	
X	WO - A - 92/00 639 (QUALCOMM) * Fig. 1; abstract *	7, 12	
A	EP - A - 0 257 110 (STANDARD ELEKTRIK LORENZ) * Fig; abstract *	7, 12	
A	EP - A - 0 486 834 (ASCOM) * Fig. 1; abstract *	1, 7	
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 27-10-1994	Examiner DRÖSCHER
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>Δ : member of the same patent family, corresponding document</p>			

EPO FORM 150 01.87 (P0401)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.